




Pico provides 3.3V from a switching regulator that works from 1.8V to 5.5V on VSYS. VBUS comes from USB on PC.

Rob Frohne (KL7NA)
Walla Walla University

Title: SDR-TRX

Rev: 0.1
Id: 1/3

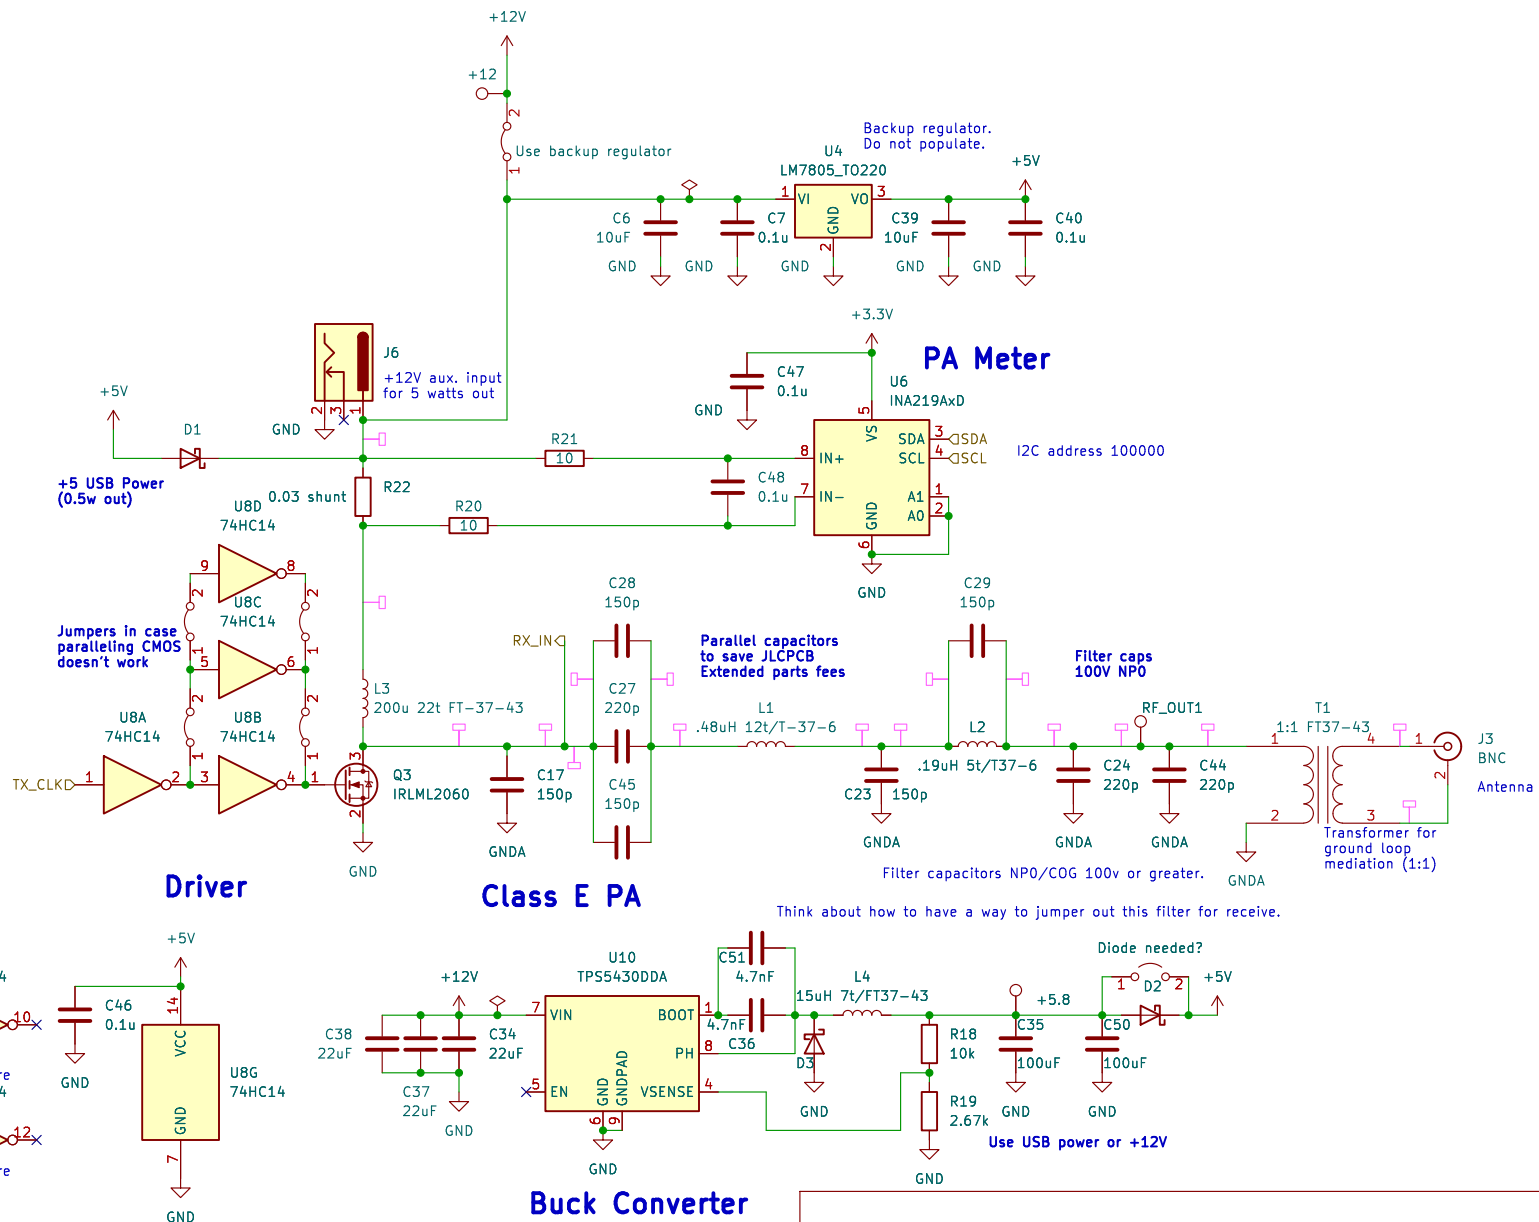

<https://dl2man.de/8-band-rf-board/>
After DL2MAN's uSDX Sandwich

Sheet: /Class E PA/
File: PA.kicad_sch

Title:

Size: USLetter Date: 2024-01-24
KiCad E.D.A. kicad 7.0.7+dfsg-1

Rev:
Id: 3/3